


Built-in beer dispenser

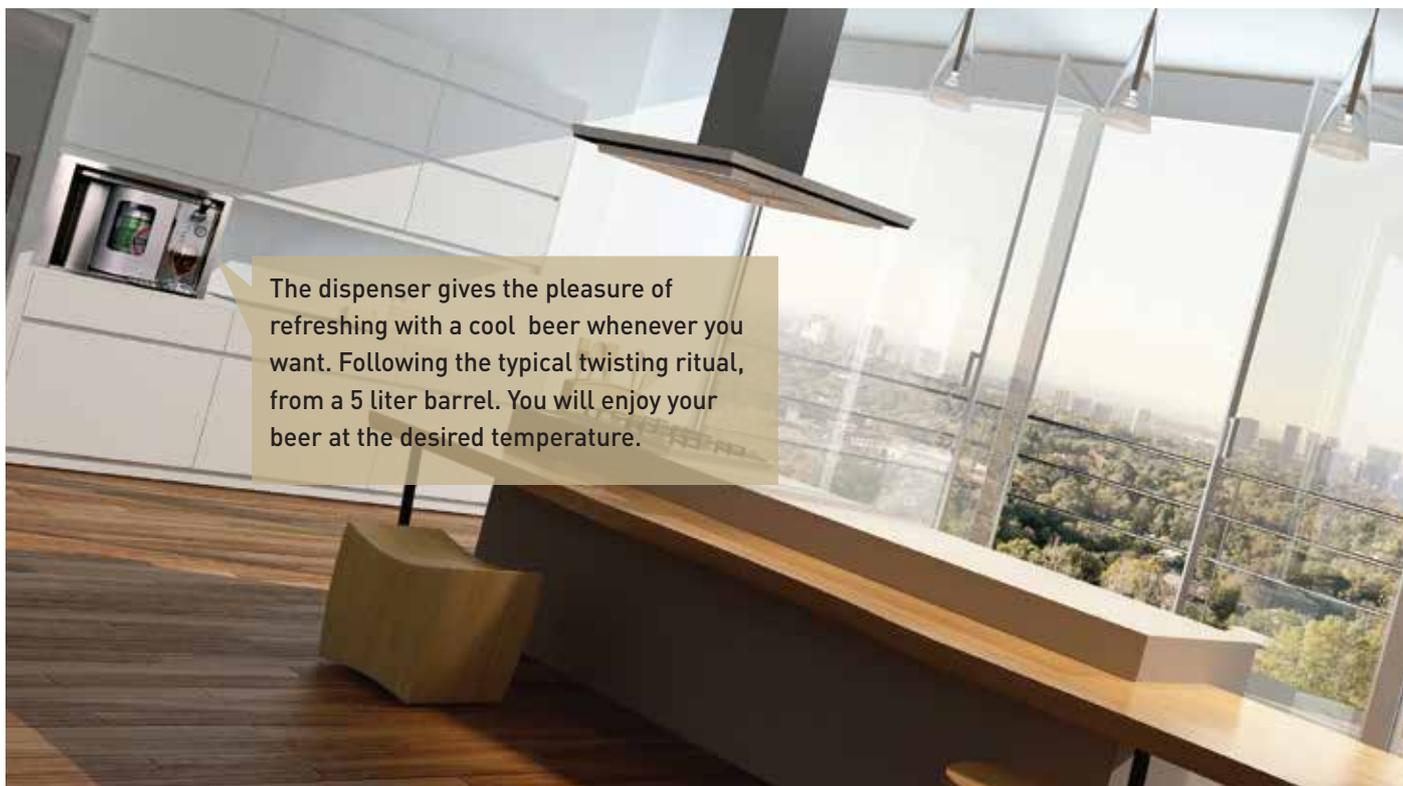

The dispenser gives the pleasure of refreshing with a cool beer whenever you want. Following the typical twisting ritual, from a 5 liter barrel. You will enjoy your beer at the desired temperature.

Profile

Completely made of stainless steel 304 has a refrigerated compartment for 5 liter beer barrel, pressurized and non-pressurized bottle cleaning, analogue pressure gauge and liquid crystal display with function indications, courtesy led.

Functions

We can adjust the temperature from 3 ° C to 12 ° C and cool the barrel from 3 ° C to 25 ° C in 9 hours. It is recommended to keep the barrel in the refrigerator at least 12 hours before inserting it into the scaler. By doing so, once pre-cooled, the dispenser will keep the temperature programmed by you for an indefinite period.

Features

- Refrigerated compartment for 5 liter beer barrels
- Temperature regulation from 3 ° C to 12 ° C
- Cooling of the barrel from 25 ° C to 5 ° C in 9 hours
- Digital display with function indications
- Courtesy Led light
- Extractable liquid collection tank
- All visible components are easily washable
- available free standing version
- Recommended room temperature: 15 ° C - 25 ° C





Series Accessories

- _ AC and DC power cables
- _ Cleaner bottle for not pressurized barrels
- _ Rubber rings
- _ Units of distribution
- _ Tube for CO2 and pressure gauge
- _ 16G CO2 cartridges and adapters
- _ Exhaust valve



Technical datas

Material:	stainless steel 304 and polypropylene
Main colour:	stainless steel and chrome details
Other colours available:	on request
Product dimensions:	H 458 x W 595 x D 323 mm
Measures of the furniture for flush mounting for fit for frame installation:	H 460 x W 597 x D 325 mm
Measures of the furniture for flush mounting:	H 450 x W 560 x D 325 mm
Net weight:	22 Kg
Packaging dimensions:	H 600 x W 700 x D 455 mm
Gross weight:	23 Kg
Volume:	0,19 m ³
Power:	70 W
Noise level:	<25 dBA
Cooling:	Peltier effect thermoelectric system
Energy consumption in a year:	1.2 kWh/24h
Voltage:	230 V AC ~ 12 V DC
Standard connection cable:	schuko
Approvals:	CE - CB - GS

Legend

Measure for flush mounting
(Fit for frame installation)

